

TOP RANGE MODEL 3500



standard

- easy use
- control
- structure



optional


- control



* E.C. market specific equipment


3500.9

195410* 109130 81350 64150 51700 42350 35270 29830 25680 22420 19840 lbs
8'2" 18'1" 23'7" 29'8" 36'4" 43'6" 61'4" 69'8" 68'8" 77'9" 87'5" ft



* Theoretical capacity at fixed hook

3500.9/7

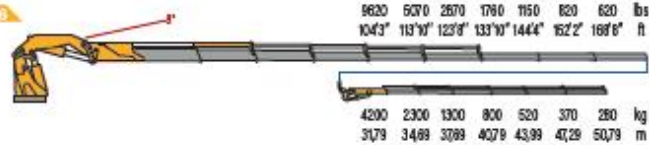

	kn.m	bar	l/min	kg	°	mm	mm	mm
3500.9	2700	330	100+50	35170	∞	2550	8900	2750
3500.9/7	2700	330	100+50	35170	∞	2550	8900	2750

	lbs.ft	psi	gal/min	lbs	°	ft/inc	ft/inc	ft/inc
3500.9	1952910	4785	26,3+13,1	77536	∞	8'2"	29'2"	8'12"
3500.9/7	1952910	4785	26,3+13,1	77536	∞	8'2"	29'2"	8'12"