

# TLR 16

MADE IN  
SPAIN



LT / ST LEASING



AUTHORITIES



LIGHTING




ELECTRICIANS



PAINTERS




OTHER ACTIVITIES

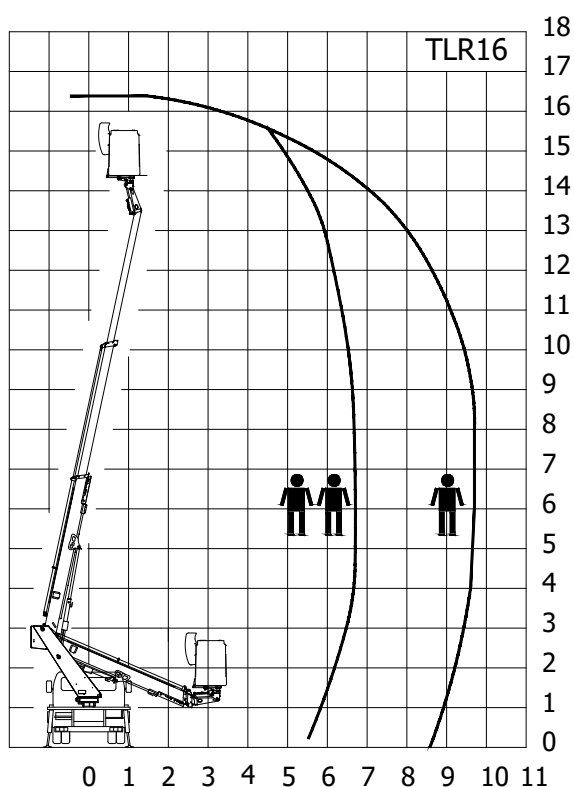

The TLR 16 model is the **universal tool** for many trades working at height.

The stabilization in the size of the platform and its performance will be appreciated on many sites. The use of proven technology makes it **simple and reliable**.

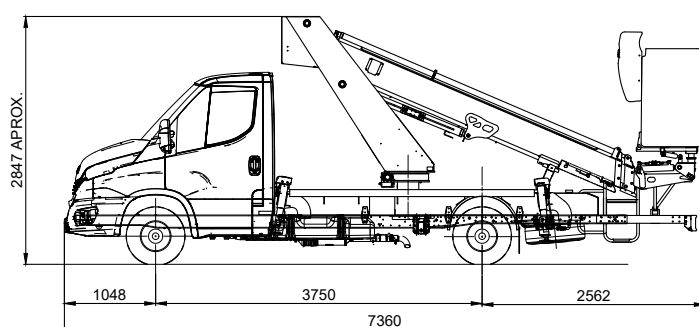

## TECHNICAL SPECIFICATIONS

As standard : ● Optional : ○

|                                            |                      |   |
|--------------------------------------------|----------------------|---|
| Working height                             | 16,40 m              | ● |
| Floor height                               | 14,40 m              | ● |
| Variable outreach proportional to the load | 9,70 m               | ● |
| Basket load                                | 230 kg               | ● |
| Turret rotation                            | 420°                 | ● |
| Maximum usage tilt / slope                 | 1,7%                 | ● |
| 1000 V insulated full opening fibre basket | 1263 x 788 x 1130 mm | ● |
| GVW                                        | 3 500 Kg             | ● |
| Steel arm with 2 telescopic elements       |                      | ● |
| Cable chain holder inside the telescope    |                      | ● |
| Hydraulic and sequential commands          |                      | ● |
| 4 hydraulic stabilisers                    |                      | ● |
| Basket rotation                            | 2 x 50°              | ● |
| Priority hydraulic back-up console         |                      | ● |
| Time counter                               |                      | ● |
| Manual backup pump                         |                      | ● |

## EQUIPMENT

|                                                             |  |   |
|-------------------------------------------------------------|--|---|
| Engine start and stop in the basket                         |  | ○ |
| Basket horn                                                 |  | ○ |
| 230 V plug in the basket with 30 mA differential protection |  | ○ |
| Aluminium toolboxes                                         |  | ○ |
| Aluminium skirts                                            |  | ○ |
| 2 LED flash lights + retro-reflective marking C1            |  | ○ |
| Maintenance contract                                        |  | ○ |

Updated : 03/2022

Non contractual document. France Elevateur SAS reserves the right to modify the characteristics of the machines



ZAC DU PLATEAU  
54630 FLAVIGNY SUR MOSELLE - FRANCE

Tél. +33 (0)3 83 23 31 32

commercial@france-eleveur.fr | www.france-eleveur.fr

### BORDEAUX

33450 Montussan  
☎ +33 (0)5 56 89 90 72

### PARIS OUEST

95310 St-Ouen l'Aumône  
☎ +33 (0)1 39 22 12 12

### PARIS SUD

91220 Brétigny sur Orge  
☎ +33 (0)1 60 85 14 23

### TOULOUSE

31770 Colomiers  
☎ +33 (0)5 34 35 83 50

### LAVAL

53000 Laval  
☎ +33 (0)2 43 49 07 28

### LYON

69800 Saint-Priest  
☎ +33 (0)4 37 25 33 90

### MARSEILLE

13300 Salon de Provence  
☎ +33 (0)4 90 59 36 27

### NANTES

44220 Couëron  
☎ +33 (0)2 40 57 02 83

### LENS

62970 Courcelles les Lens  
☎ +33 (0)3 21 79 32 15

### CLERMONT-FERRAND

63050 Clermont-Ferrand  
☎ +33 (0)4 73 84 23 22

### FE BENELUX

7522 Marquain - Belgium  
☎ +32 (0)56 51 40 26

### ALLEMAGNE

04179 Leipzig  
☎ +49 (0)341/30 88 95-0